

# CaTop M 120 (SK)




CE 11



# CaTop M 120 (SK)

SYSTEMATIC SAFETY AND ENERGY EFFICIENCY

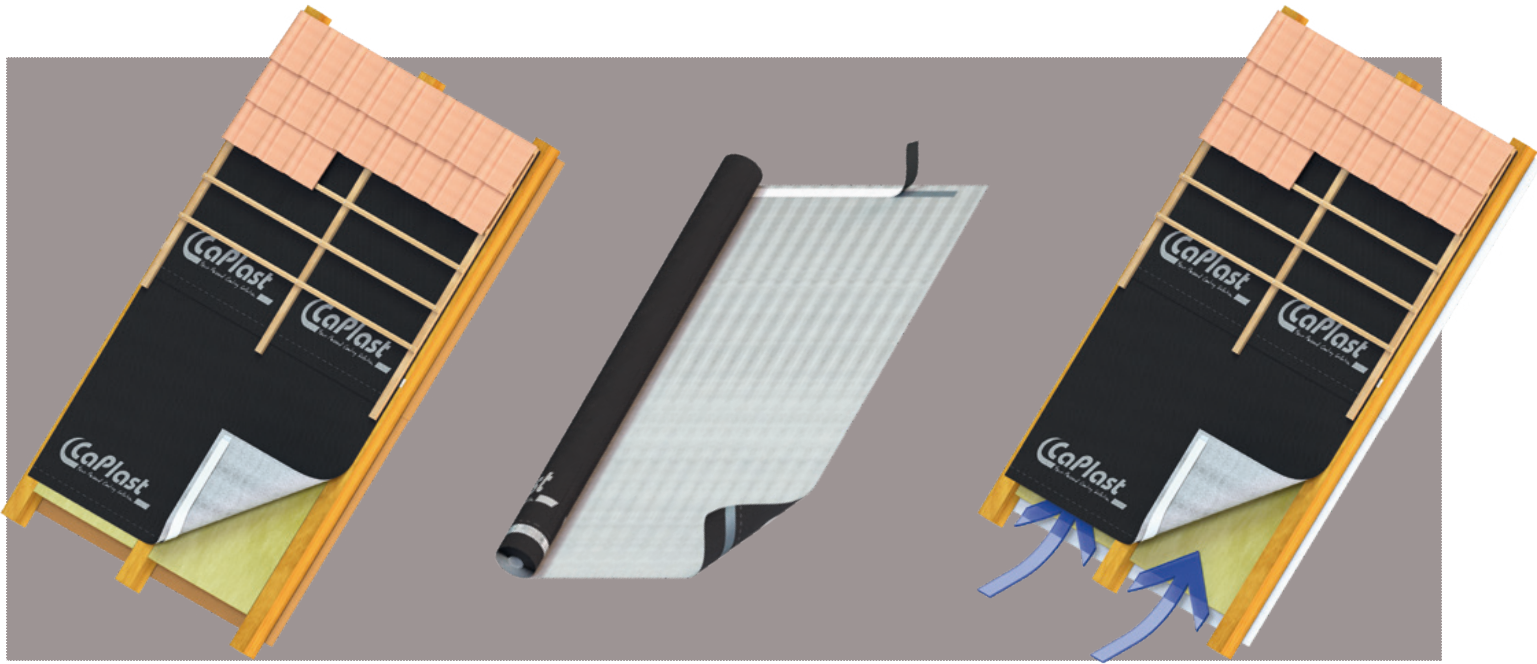

CaTop M 120 SK is a diffusion permeable, standard-compliant sarking membrane, that has two double-sided self-adhesive strips, applied both sides. Also available without self-adhesive strips, as CaTop M 120. The multi-layer membrane is made of polypropylene non-woven fabrics separating an inner-lying functional membrane.

It is recommended for use on renovations, but particularly when creating new pitched roof constructions or facades. When working with the material it is necessary to observe the applicable standards and all other manufacturers guidelines and rules, as well as the CaPlast laying information. Subject to technical modifications.

## FIELDS OF APPLICATION

- Sarking and underlay
- Temporary roof covering
- Rear ventilated and non rear ventilated constructions
- Renovation work and new constructions

## BENEFITS

- Integrated self-adhesive strips
- Approved sealing against driving rain
- Solid standard product/high quality underlay
- Highly open to diffusion
- Impervious to wind, water and driving rain
- Secure laying and easy handling

## TECHNICAL DATA

Weight (g/m <sup>2</sup> )	140 ± 10%
Building material	E
Resistance to water penetration	W 1
s <sub>d</sub> -value (m)	0.04 ± 0.02
Resistance to water pressure (cm WS)	> 400
Tear resistance L/T (N/5 cm)	240/190 ± 25/± 30
Elongation L/T (%)	50/35 ± 15
Nail tear resistance L/T (N)	130/140 ± 30
Temperature resistance (°C)	- 40 to + 80
Temporary roof covering (weeks)	4
Roll width/Roll length (m)	1.50/50 3.00/50